


## Reactive silicone Tech-2310

### Description

Tech-2310 is organic silicone modified by terminal epoxy. By the reaction of the terminal group, organic silicone component can be brought into the epoxy materials thus improve the flexibility, water resistance, smooth and weather resistance abilities of epoxy materials.

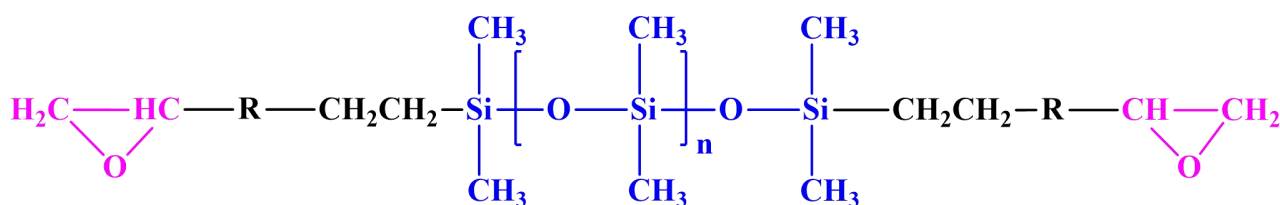

### Physics and Chemical properties

**Ingredient:** Epoxy-terminated polysiloxane ( $M_n \approx 1000$ )

**Appearance:** Light yellow transparent liquid

**Content:** 100%

### Application System and Dosage

Tech-2310 could be used in any cross-linking system that is reacted via epoxy such as epoxy resin. The amount is 0.2-1% for persistent slip and 2-6% for anti-dirt.

### Package

25kg metal pail.

## TECH Polymer

A company focus on additives since its birth

For research and development purposes only, there is no warranty of any kind, so please test its suitability in advance.

#### ■ Shanghai Company –

Address: 5th Floor, Building 11, Shanghai Zhi Cheng, Lane 8666, Hunan Road, Pudong New Area, Shanghai

#### ■ Guangdong Company –

Address: Unit 403, Building 1, Baozhi Garden, Leliu Street, Shunde District, Foshan City, Guangdong Province.

Tel: 021-50796110 Fax: 021-50796113 Tel: 0757-22689820 Fax: 0757-22689270

MSDS/TDS: [www.tech-polymer.com.cn](http://www.tech-polymer.com.cn)

