


Reactive silicone Tech-2420

Description

Tech-2420 is modified silicone compound that has high reactive terminated functional group—CH₂NH₂. Through by its reaction, the Tech-2420 can bring organic silicon into the materials so as to improve the flexibility, water resistance, smooth, weather resistance and so on the characters. Meanwhile, Tech-2420 can create the permanent low surface tension layout on the paint film surface.

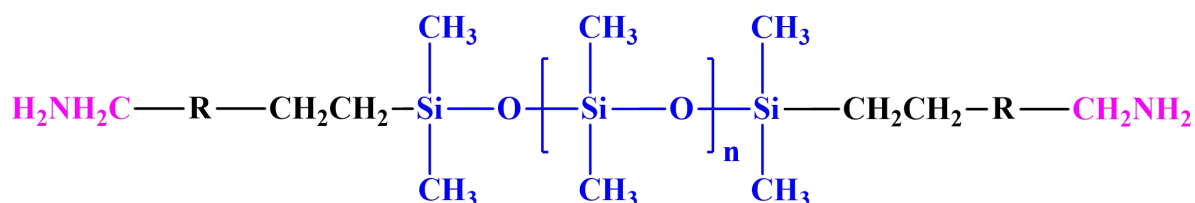

Physics and Chemical properties

Ingredient: Amine-terminated polysiloxane (Mn≈2000)

Appearance: Light yellow transparent liquid

Content: 100%

Application System and Dosage

The amount is 0.2-1% for persistent slip, 2-6% for anti-dirt. Tech-2420 can be introduced in any step during manufacture.

Package

25kg metal pail.

TECH Polymer

A company focus on additives since its birth

For research and development purposes only, there is no warranty of any kind, so please test its suitability in advance.

■ **Shanghai Company –**

Address: 5th Floor, Building 11, Shanghai Zhi Cheng, Lane 8666, Hunan Road, Pudong New Area, Shanghai

■ **Guangdong Company –**

Address: Unit 403, Building 1, Baozhi Garden, Leliu Street, Shunde District, Foshan City, Guangdong Province.

Tel:021-50796110 Fax:021-50796113 Tel:0757-22689820 Fax:0757-22689270

MSDS/TDS: www.tech-polymer.com.cn

